

**MonoRail Surface Transformer-300W Mag**



**DESCRIPTION**

This single-feed surface transformer converts standard 120 line voltage to 12 volts to provide the necessary voltage for powering a MonoRail low-voltage lighting system. It can power lamps totaling up to 300 watts. The transformer is concealed inside a decorative housing with a fast acting secondary circuit breaker that will safely turn the system off should a short occur. Once the short has been removed the breaker can be reset.

**INSTALLATION**


This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box (not included). Rail is installed through the power feed on the canopy to bring power to the run.

**OTHER**

Black and white finish have satin nickel feeds. The shortest rigid standoff that can be used with this surface transformer is the 4" rigid standoff (sold separately). If dropping the rail more than 4" below the ceiling, order the desired rigid standoff length and one compatible power extender (sold separately). This surface transformer may be plugged in with the addition of a Plug Option, a 16' cord with plug (sold separately). 12 volt transformers require the use of 12 volt lamps.

**WEIGHT**

12.15lb / 5.51kg ±

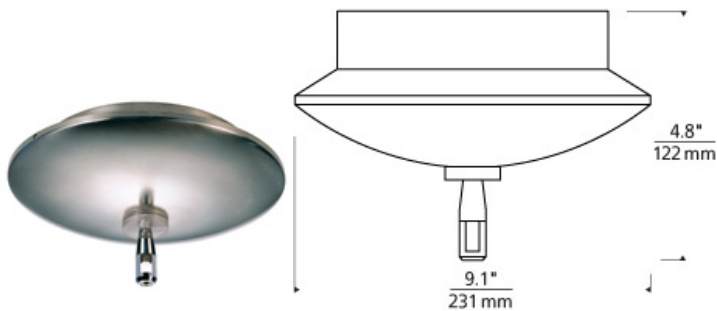

**ORDERING INFORMATION**

**700MOSRT30D FINISH**

- Z ANTIQUE BRONZE
- B BLACK
- C CHROME
- S SATIN NICKEL
- W WHITE

As a general rule when using LED fixtures we do not recommend using greater than 70% of specified maximum wattage on the transformer due to inrush current. for assistance, please contact our technical support department.



700MOSRT30D \_\_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_