

LOW - VOLTAGE HEADS

Cam Head T20

DESCRIPTION


The Cam display head by Tech Lighting combines minimal design style with high-functionality. This unique display head rotates a full 360° and pivots at 90° allowing for direct light beam in the desired location. The Cam is available in two on-trend finishes and four distinct stem lengths. This low-voltage display head is compatible with a myriad of accessories and systems available by Tech Lighting that further enhances its performance and style. This dynamic display head is ideal for commercial lighting applications such as retail stores, libraries and galleries. The Cam accommodates a fully dimmable MR16 lamp (sold separately). Low-voltage, MR16 lamp of up to 75 watts (not included). Dimmable with Low-Voltage electronic or magnetic dimmer (based on transformer).

INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system. For use on T-TRAK, order FreeJack version and T~TRAK FreeJack Connector (sold separately).

WEIGHT

0.26-0.86lb / 0.12-0.39kg ±

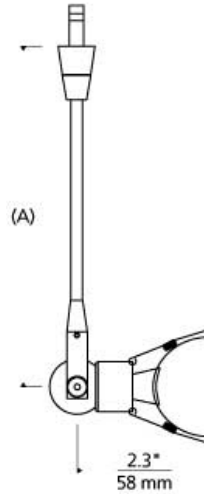

cam head

ORDERING INFORMATION

700 SYSTEM	CAM	LENGTH (A)	FINISH
FJ	FREEJACK	03 3"	C CHROME
MP	MONOPOINT	06 6"	S SATIN NICKEL
MO	MONORAIL	12 12"	
MO2	TWO-CIRCUIT MONORAIL		
WMO	WALL MONORAIL		

Note: MP includes 4" Round Flush Canopy.



TECH LIGHTING®

7400 Linder Avenue T 847.410.4400
Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700 ____ CAM ____ ____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2019 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.