

Classically elegant with contemporary cylindrical design, the Gage wall sconce creates a wide dispersion of soft LED up and down light to create both accent and ambient outdoor lighting. Mounting options enable the fixture to be mounted in three different height positions relative to the back plate to meet a variety of installation needs and aesthetic preferences.

High quality LM80-tested LEDs

for consistent long-life performance and color

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

Three-position mounting option allows

variable height adjustment to back plate (See page 2 for illustrations)

SPECIFICATIONS

| | |
|-----------------------|---|
| DELIVERED LUMENS | 1480 |
| WATTS | 29.6 |
| VOLTAGE | Universal 120V-277V, with integral transient 2.5kV surge protection (driver) |
| DIMMING | 0-10, ELV |
| LIGHT DISTRIBUTION | Symmetric |
| MOUNTING OPTIONS | 3-Position Variable Wall Height |
| PERFORMANCE OPTIONS | Surge Protector |
| CCT | 3000K or 4000K |
| CRI | 80+ |
| COLOR BINNING | 3 Step |
| BUG RATING | B1-U4-G1 |
| DARK SKY | Non-Compliant |
| WET LISTED | IP65 |
| GENERAL LISTING | ETL |
| CALIFORNIA TITLE 24 | Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required. |
| START TEMP | -30°C |
| FIELD SERVICEABLE LED | Yes |
| CONSTRUCTION | Aluminum |
| HARDWARE | Stainless Steel |
| FINISH | Marine Grade Powder Coat |
| LED LIFETIME | L70; 70,000 Hours |
| WARRANTY* | 5 Years |
| WEIGHT | 5.6 lbs. |

* Visit techlighting.com for specific warranty limitations and details.




GAGE 20
shown in bronze

GAGE 20
shown in charcoal

ORDERING INFORMATION

| 7000WGAG | CRI/CCT | LENGTH | LENS | FINISH | VOLTAGE | DISTRIBUTION | OPTIONS |
|----------|---------------|--------|-----------|------------|---------------|--------------|---------------------|
| 830 | 80 CRI, 3000K | 20 20" | D DIFFUSE | Z BRONZE | UNV 120V-277V | S SYMMETRIC | NONE |
| 840 | 80 CRI, 4000K | | | H CHARCOAL | | | SP SURGE PROTECTION |

GAGE 20 WALL SCONCE

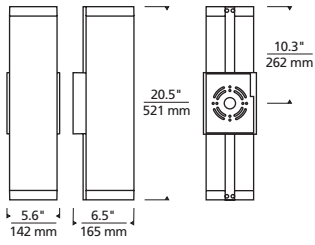

Gage 20




Integrated height adjustment system allows you to customize the fixture position. Low, Mid, or High.

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

GAGE 20

- Total Lumen Output: 1480
- Total Power: 29.6
- Luminaire Efficacy: 49.9
- Color Temp: 3000K
- CRI: 80+
- BUG Rating: B1-U4-G1

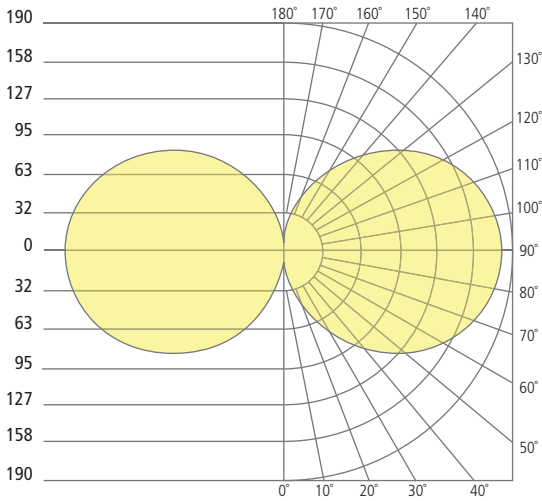

PROJECT INFO

| FIXTURE TYPE & QUANTITY | JOB NAME & INFO | NOTES |
|-------------------------|-----------------|-------|
| | | |
| | | |



GENERATION BRANDS
7400 Linder Avenue, Skokie, Illinois 60077
T 847.410.4400 F 847.410.4500