


**MonoRail Surface Transformer-60W EI LED**



**DESCRIPTION**

This single-feed surface transformer converts standard 120 line-voltage to 12 volts to provide the necessary voltage for powering a MonoRail low-voltage lighting system. It can power lamps totaling up to 60 watts. The transformer is concealed inside a decorative housing with a fast acting secondary circuit breaker that will safely turn the system off should a short occur. Once the short has been removed the unit can be reset by simply flipping the wall switch off and back on.

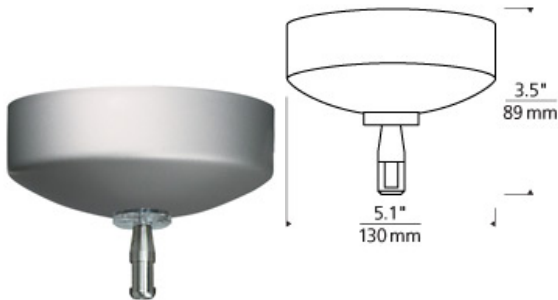

**INSTALLATION**

This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box (not included). Rail is installed through the power feed on the canopy to bring power to the run.

**OTHER**

Black and white finish have satin nickel feeds. The shortest rigid standoff that can be used with this surface transformer is the 3" rigid standoff (sold separately). If dropping the rail more than 3" below the ceiling, order the desired rigid standoff length and one compatible power extender (sold separately). 12 volt transformers require the use of 12 volt lamps.

**WEIGHT**

1lb / 0.45kg ±

**ORDERING INFORMATION**

**700MOSRT60E FINISH**

- Z- ANTIQUE BRONZE  
LED
- B- BLACK  
LED
- C- CHROME  
LED
- S- SATIN NICKEL  
LED
- W- WHITE  
LED

As a general rule when using LED fixtures we do not recommend using greater than 70% of specified maximum wattage on the transformer due to inrush current. for assistance, please contact our technical support department.



7400 Linder Avenue T 847.410.4400  
Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700MOSRT60E \_\_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_