

The Mode Single outdoor LED flood/accent light features a minimalist tubular profile with 185° tilt adjustment and 359° rotation for maximum aiming flexibility. Mode Single allows accent and way-finding options in a stake- or bolt-mounted path fixture.

### Mode features

- 185° tilt adjustment and 359° rotation for wide aiming flexibility
- Lockable
- Angle markers for consistent and precise aiming
- IP65 rated with marine-grade powder coat finishes
- Multiple stem lengths

### SPECIFICATIONS

DELIVERED LUMENS	780
WATTS	8.6
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
OPTICS	20°, 30°, 40°, and 60°
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K, 3500K or 4000K
CRI	90+
COLOR BINNING	3-Step
BUG RATING	B1-U0-G0 (20° Optic)
DARK SKY	Non-Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 50,000 Hours
WARRANTY*	5 years
WEIGHT	2.6 lbs.



MODE  
shown in bronze



MODE  
shown in charcoal

### 12V AC TRANSFORMERS\*






(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
<b>7000T150T</b>	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
<b>7000T150T277</b>	MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
<b>7000T300T</b>	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC

### ORDERING INFORMATION

7000AMDES	CRI	COLOR TEMPERATURE	LENGTH (A)	BEAM SPREAD	FINISH	INPUT VOLTAGE	OPTION
	9 90 CRI	27 2700K	9 9"	20 20°	Z BRONZE	12 12 VOLT*	CONCRETE MOUNT
		30 3000K	13 13"	30 30°	H CHARCOAL		ST STAKE MOUNT
		35 3500K	19 19"	40 40°			
		40 4000K	25 25"	60 60°			

\*REQUIRES 12V REMOTE TRANSFORMER

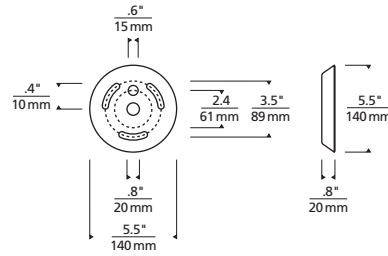

LENGTH (A)	
9	9.24"
13	13.24"
19	19.24"
25	25.24"

Mode Single Path/Flood

Anchor Plate Bolt Pattern

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### MODE 20° SINGLE

Total Lumen Output:	652
Total Power:	8.6
Luminaire Efficacy:	76
Color Temp:	3000K
CRI:	90+
BUG Rating:	B1-U0-G0

### MODE 30° SINGLE





Total Lumen Output:	711
Total Power:	8.6
Luminaire Efficacy:	83
Color Temp:	3000K
CRI:	90+
BUG Rating:	B1-U0-G0

### MODE 40° SINGLE

Total Lumen Output:	780
Total Power:	8.6
Luminaire Efficacy:	90
Color Temp:	3000K
CRI:	90+
BUG Rating:	B1-U0-G0

### MODE 60° SINGLE

Total Lumen Output:	724
Total Power:	8.6
Luminaire Efficacy:	84
Color Temp:	3000K
CRI:	90+
BUG Rating:	B1-U0-U0

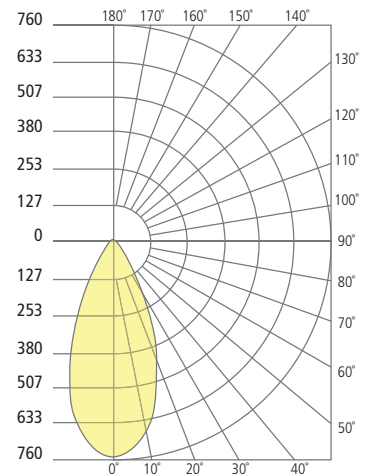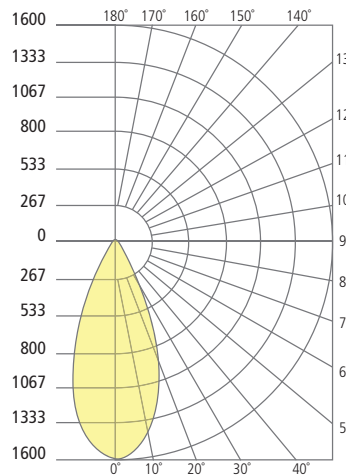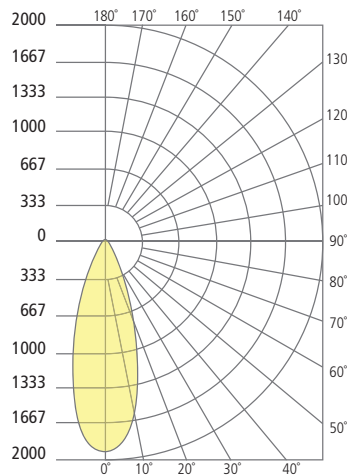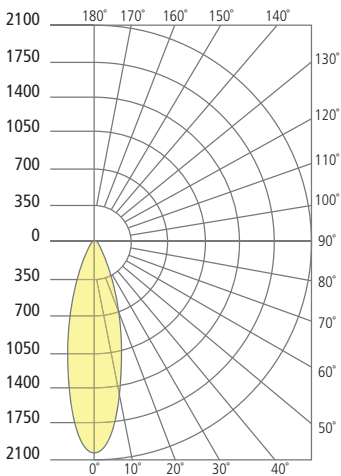

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.