

Stonington Pendant

CP1101, CP1112 | 1.0

GENERATION LIGHTING

Pendant

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2020 Generation Lighting. All rights reserved.


The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.



SAVE THESE INSTRUCTIONS!

Install the Fixture

IA

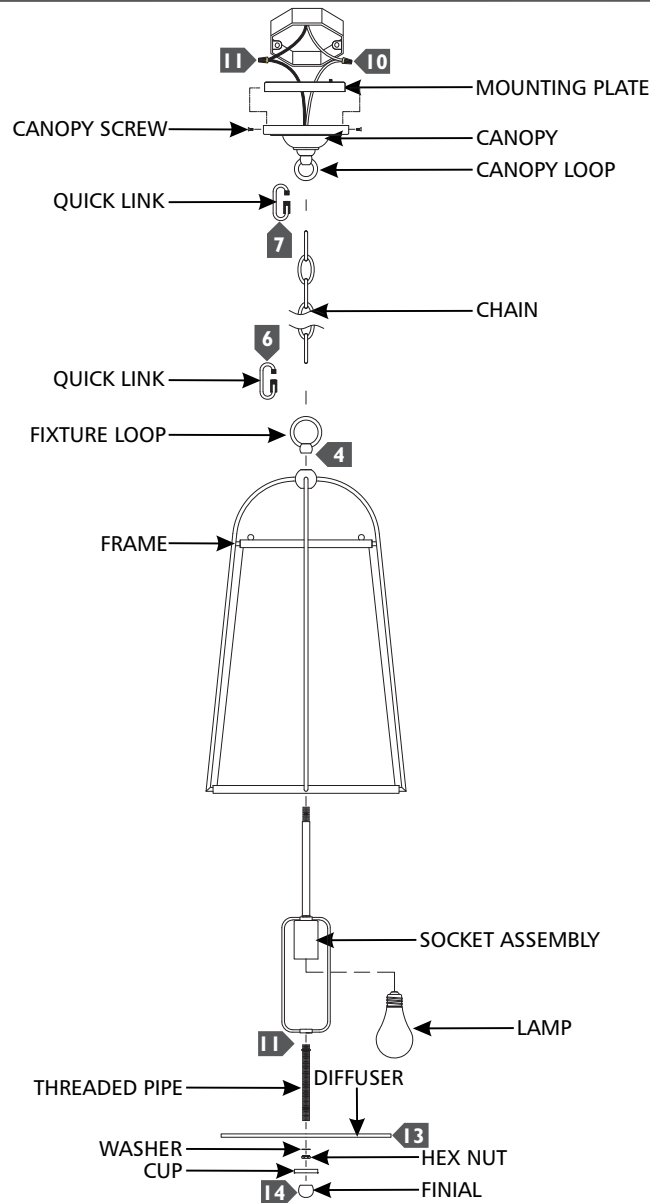

- 1** Secure the mounting plate to the junction box.
- 2** Feed the fixture wires through the frame and fixture loop, then lower the frame onto the socket assembly pipe and secure together by screwing the fixture loop onto the pipe.
- 3** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 4** Install a quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 5** Install a quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 6** Weave the cord through the chain, canopy, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 7** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 8** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 9** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 10** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the canopy screws.
- 11** Screw the threaded pipe to the bottom of the socket assembly.
- 12** Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage information.
- 13** Place the diffuser and washer onto the threaded pipe, then secure in place by screwing the hex nut onto the pipe.
- 14** Place the cup onto the threaded pipe and secure in place by screwing the finial onto the pipe.