

# F R E E J A C K

## FreeJack Linear Canopy 3-port

### DESCRIPTION

Mounts to a standard 4" junction box with round plaster ring (provided by electrician). Electronic transformers inside a 28" by 4" housing. Three FreeJack ports; for ceiling only.

### INSTALLATION


This product can mount to either a 4" square electrical box with round plaster ring or an octagonal electrical box (not included). For ceiling only. Transformers (included) fit in canopy.

### OTHER

"For use with any three 12 volt halogen FreeJack pendants or heads

### WEIGHT

7.3lb / 3.31kg ±

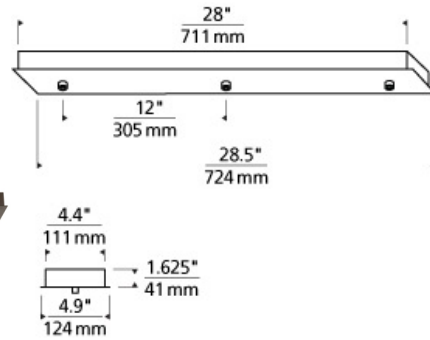

freejack linear  
canopy 3-port

### ORDERING INFORMATION

700FJL3 SHAPE OR SIZE	FINISH	VOLTAGE
RECTANGLE 3 PORT LINEAR INTEGRAL TRANSFORMER	Z ANTIQUE BRONZE	120V IN/12V OUT
	B BLACK	-277 277V IN/12V OUT
	C CHROME	
	S SATIN NICKEL	
	W WHITE	



**TECH LIGHTING®**

7400 Linder Avenue T 847.410.4400  
Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700FJL3 \_\_\_\_\_

FIXTURE TYPE: \_\_\_\_\_

JOB NAME: \_\_\_\_\_

NOTES: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_



©2018 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.