

# Kelan Flush mount

AF1173 | 1.0

## GENERATION LIGHTING FLUSH MOUNT

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**Use minimum 90°C supply conductors.**

**SAVE THESE INSTRUCTIONS!**

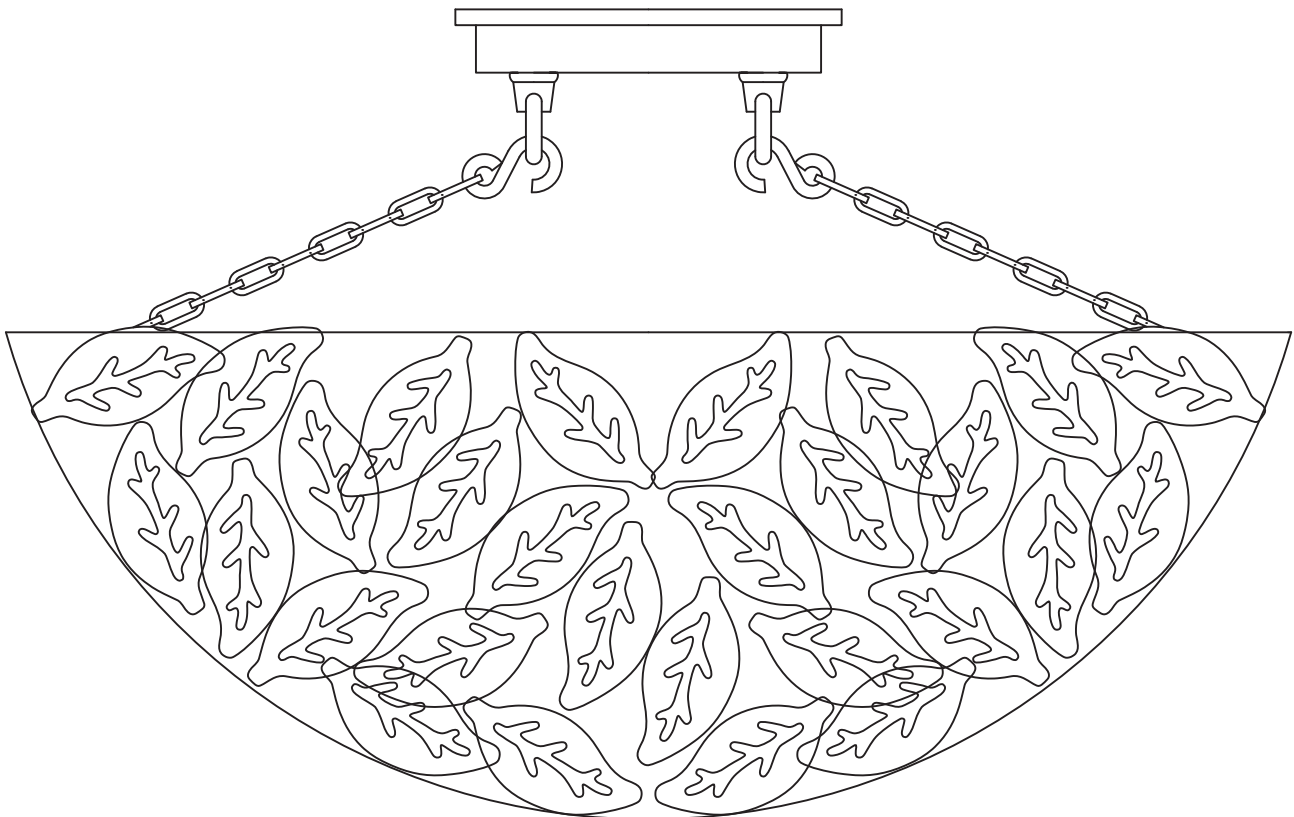

GENERATION LIGHTING  
7400 Linder Ave., Skokie, IL 60077  
T 847.410.4400 | F 847.410.4500  
www.generationlighting.com

# Install the Fixture

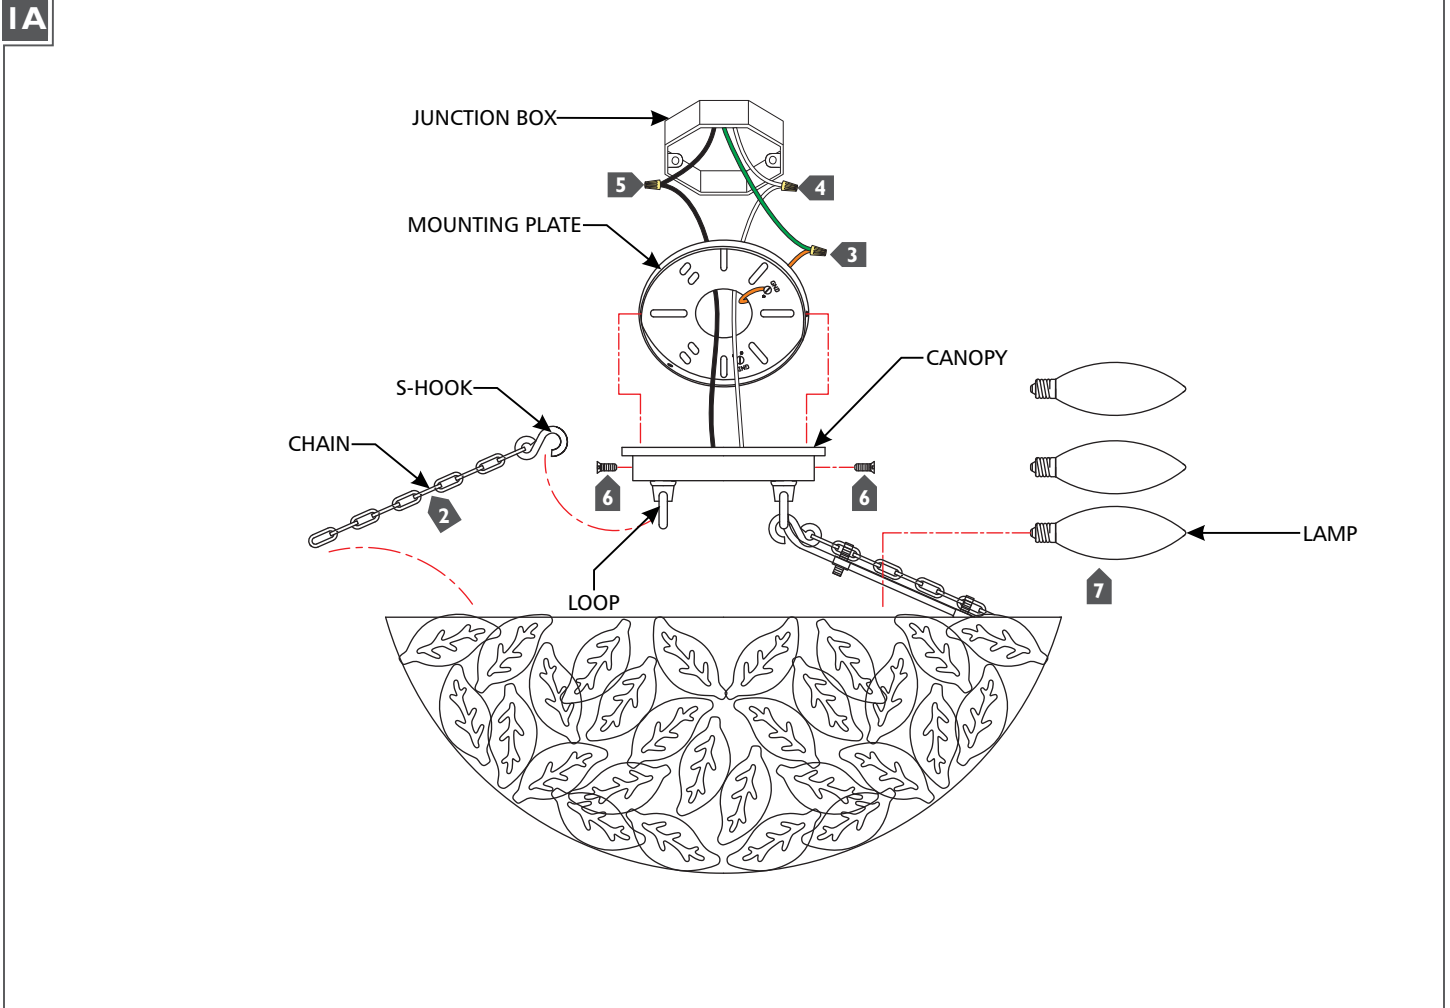

- 1 Secure the mounting plate to the junction box.
- 2 Attach the end of the chain with the s-hook to the loop on the canopy, then attach the other end of the chain to the shade assembly.
- 3 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5 Connect the black fixture wire to the hot power line wire with a wire nut.
- 6 Neatly tuck the wiring into the junction box, place the canopy onto the mounting plate, and secure it in place with the canopy screws.
- 7 Screw the lamps into the sockets. Refer to the label on the socket for max wattage information.